

FIGURE 1



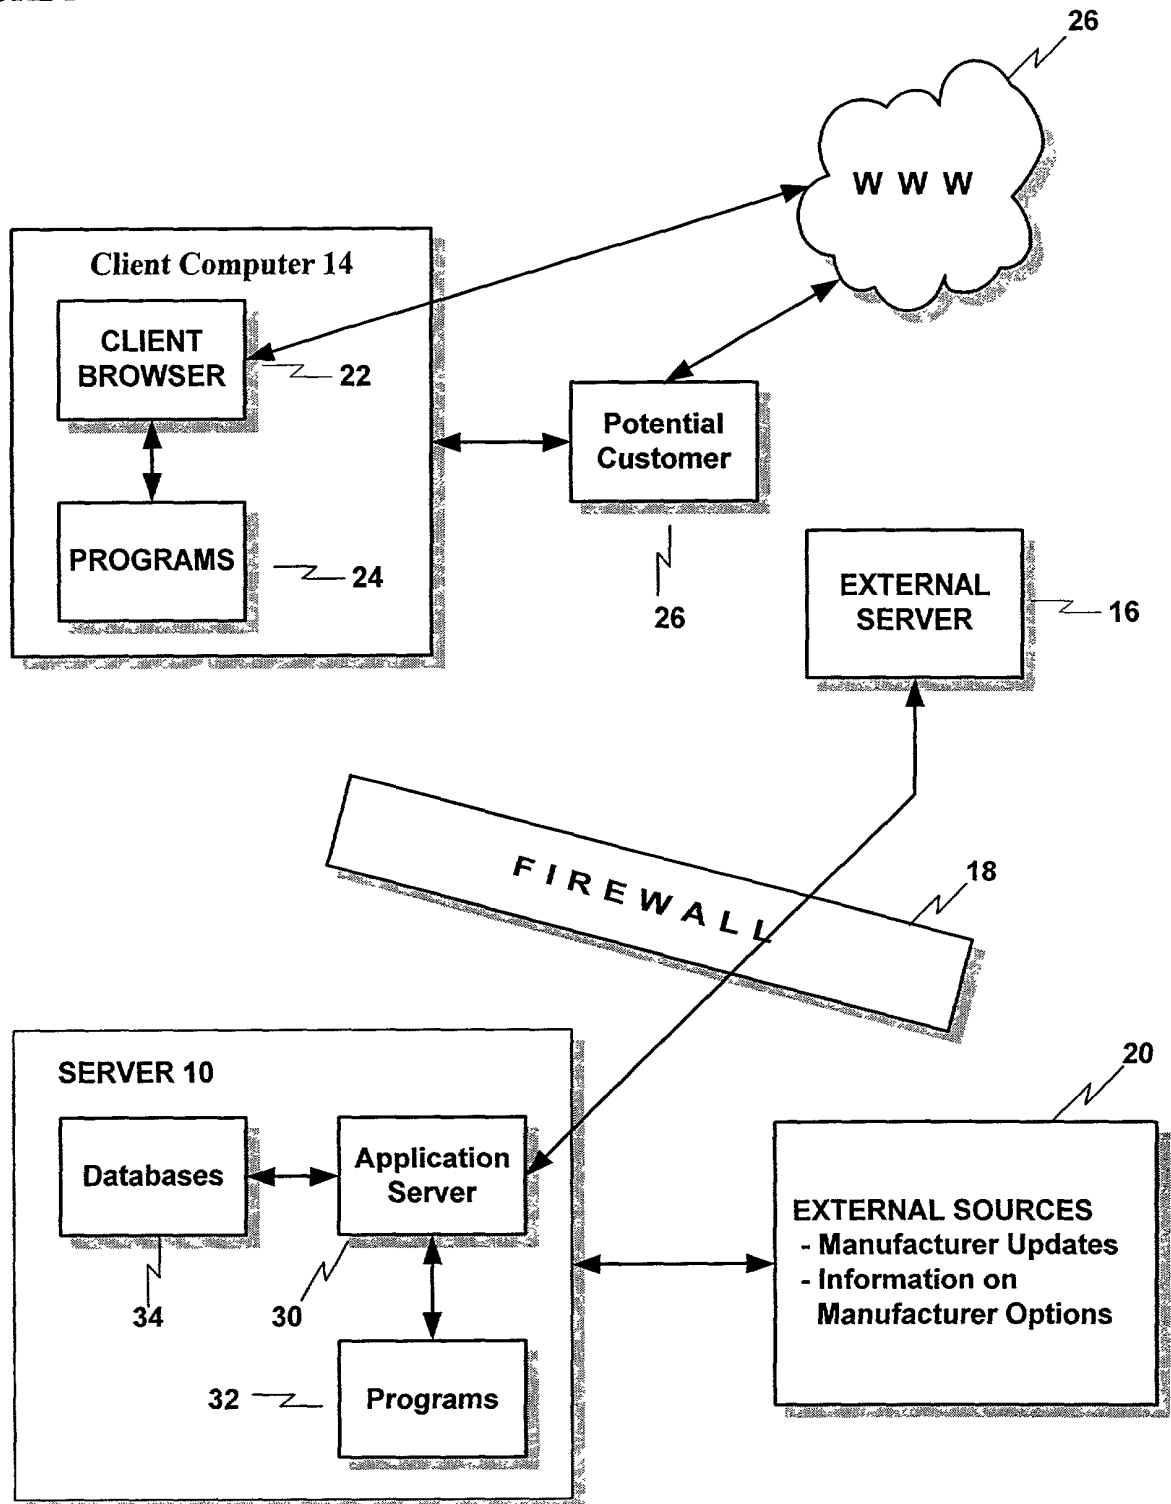


FIGURE 2

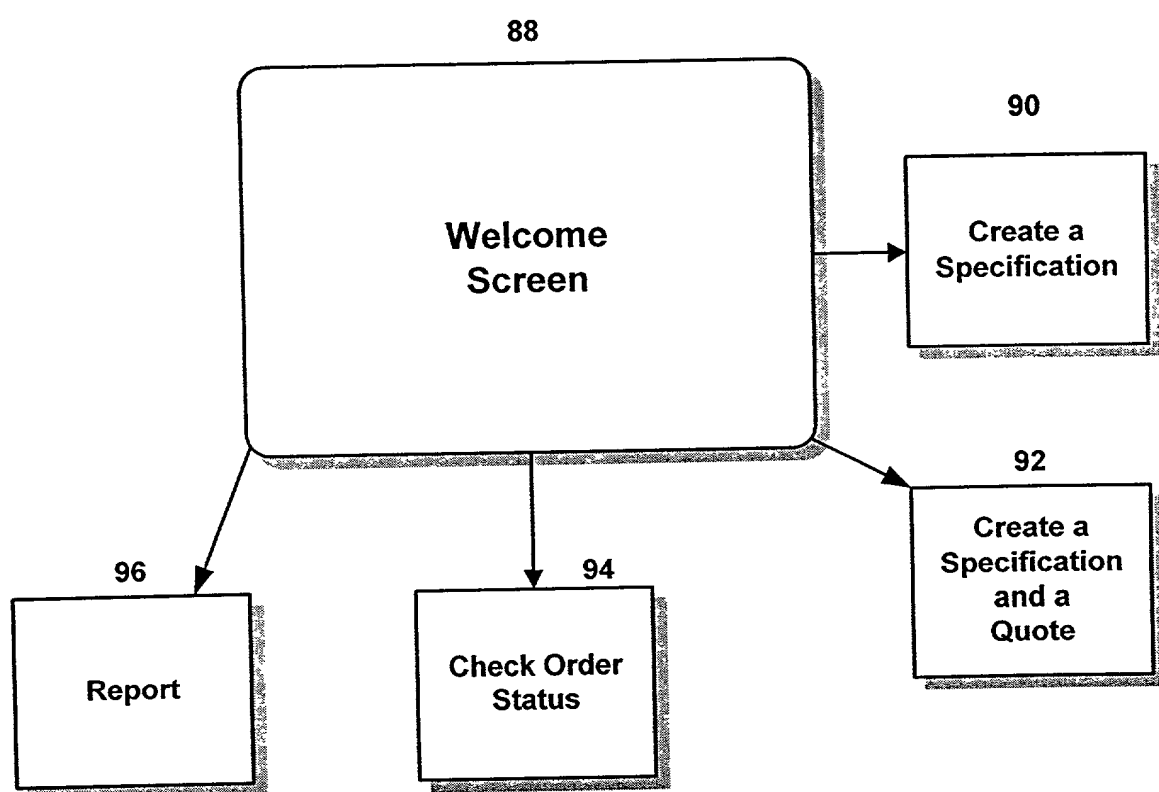

Truck Spec #1 - Chassis

Truck EZ Specs



Medium Duty Truck EZ Spec #1

Figure 3

GE Standard Chassis Spec | Go to GE Standard Body Spec



GE Capital Fleet Services

**STANDARD SPEC 1 -- WB 203 -- CA 138 -- GVW 26,000 -- Approximate
Payload 12,000 Lb.**

ENGINE:

210HP 560lbs torque @ 1400 RPM

ENGINE EQUIPMENT:

Clutch Eaton 14" two plate
Block Heater Phillips 1000 watt
Exhaust Single RH Horz Muffler
Fan Drive Viscous
Fuel Filter
Anti Freeze -30 Degrees
Alternator 100 Amp
Batteries (2) GRP 31 1520 CCA
Starter Deco 41MT

TRANSMISSION:

Fuller six speed
Magnetic Engine Drain Trans/R Axle
Fill and drain plugs

FRONT AXLE:

8,000 LB. Capacity
Front Shock Absorbers
9,000 LB. Front Springs
Power Steering TRW TAS65

REAR AXLE:

17,500 LB. Capacity
18,000 to 20,000 LB.. Rear Suspension
Spring
Synthetic Lube Frt. RR & Transmission
Ratio 4.10

BRAKES:

Hydraulic Brakes
Anti-Lock Braking System

FRAME:

5/16" x 3" x 10 1/8"
Wheel Base approx. 204" w/ca 138
End of Frame Square

FUEL TANKS:

Single 50 Gallon Tank
Fuel Water Separator w/Heat

TIRES AND WHEELS:


10R22.5 Front Tires
10R22.5 Rear Tires
Wheels Disc 22.5 x 7.50 Frt. & RR

CAB EQUIPMENT:

SS Mirrors Heated
Convex Mirrors
Bench Seat Vinyl
Circuit Breakers
Am/Fm Stereo
Tinted Glass
Fire Extinguisher
Triangle Flare & Safety Kit
Back Up Alarm
Intermittent Wipers
Paint One Color

Truck Spec #1 - Chassis

Figure 4a

[View GE Standard Chassis Spec](#)

Visit
International's
Website

Cab Conventional 80"

Truck Spec #1-Navistar

Glass Tinted
Color Interior Pearl Gray
Mirrors West Coast 16 x 7" Heated for 102"
wide
Convex mirrors 8"
Interior Trim Deluxe
Exterior Color White
Intermittent wipers
AM/FM Stereo
Halogen head lights
Day time running lights
Cigar lighter

Figure 46

[Back To Top](#)

Select Options:

WHEEL BASE OPTIONS:

- ☐ APPROX 218 WITH 150 CA (20' BODY)
\$N/C
- ☐ APPROX 238 WITH 168 CA (22' BODY)
\$N/C
- ☐ APPROX 254 WITH 186 CA (24' BODY)
\$268.00

FUEL TANKS:

- ☐ DUAL 50 GALLON ILO SINGLE \$
262.00

CAB OPTIONS:

- ☐ AM/FM STEREO WITH CASSETTE
\$42.00
- ☐ AIR CONDITIONING \$640.00

ENGINES AND TRANSMISSIONS:

- ☐ 230 HP ENGINE @ 2300 RPM 620FT lbs
\$1,185.00 (INCLUDES ESO66-7B
TRANSMISSION)
- ☐ ALLISON MD3060P ILO OF MANUAL
\$6,673.00

[Back To Top](#)

Calculate Subtotal (Chassis):

38710.12 — 55


[\(continue\)](#) [\(reset\)](#)

[Back To Top](#)

10360: 2020

Truck Spec #1 - Body

Truck EZ Specs



Medium Duty Truck EZ Spec #1

Figure 5

GE Standard Body Spec | Go to GE Standard Chassis Spec

MORGAN

SUPREME

GRUMMAN OLSON

GE Capital Fleet Services
STANDARD BODY SPEC 1

SIDE PANELS

.040" PREPAINTED WHITE ALUMINUM
WITH Z-POSTS ON 16" CENTERS

FRONT END

AERODYNAMIC RADIUS DESIGN

FLOOR

1 1/8" LAMINATED HARDWOOD, TWO
SCREWS PER BOARD PER CROSSMEMBER;
THRESHOLD FLUSH TO REAR WITH DRAIN
HOLES

UNDERESTURCTURE

FOR SINGLE AXLE - 3" STEEL I-BEAMS ON
12" CENTERS WITH STEEL PAN OVER
TIRE AREA; 4" STEEL I-BEAM
LONGITUDINAL RAILS; MYLAR TAPE
BETWEEN CROSSMEMBER AND BOTTOM
RAIL

INTERIOR LINER

SIDES - 3/8" PLYWOOD, FULL HEIGHT

INTERIOR LINER

FRONT - 1/2" PLYWOOD, FULL HEIGHT

ROOF

ONE PIECE CROWNED ROOF - .032"
ALUMINUM SHEET; TENSION INSTALLED
OVER GALVANIZED STEEL ROOF BOWS
ON 24" CENTERS WITH ADHESIVE

REAR FRAME

PAINTED GALVANNEALED STEEL WITH
BUILT-IN CLEARANCE LIGHT PROTECTING
HEADER; GRAB HANDLE ON CURBSIDE

REAR DOOR

TODCO PLASTIC COVERED OVERHEAD

EXTERIOR LIGHTS

GROTE TURTLEBACK - PER FMVSS-108
SPECIFICATIONS, INCLUDING
REFLECTORS

INTERIOR LIGHT

DOMELIGHT WITH SWITCH IN CAB

DOCK BUMPER

10" WOOD FILLED

D.O.T. UNDERRIDE

5" STRUCTURAL STEEL UNDERRIDE
PROTECTOR WITH POOCHED
HORIZONTAL SURFACE

MOUNTING


UNDERCOATED; MOUNTED WITH
TAPERED WOOD SLEEPER SLATS AND
5/8" DIAMETER STEEL U-BOLTS
PAINTED; BLACK; MORGAN ANTI-SAIL
MUD FLAPS INSTALLED

FOB POINT: FACTORY

TRUCK SPEC #1

Truck EZ Specs

Figure 69



Medium Duty Truck EZ Spec #1

View GE Standard Body Spec

MORGAN

SUPREME

GRUMMAN OLSON

GE Capital Fleet Services
MORGAN STANDARD SPEC 1

GO TO:

**SELECT VAN BODY | SELECT OPTIONS | CALCULATE SUBTOTAL (BODY) |
CALCULATE TOTAL PRICE**

SIDE PANELS

.040" PREPAINTED WHITE ALUMINUM
WITH Z-POSTS ON 16" CENTERS

FRONT END

AERODYNAMIC RADIUS DESIGN

FLOOR

1 1/8" LAMINATED HARDWOOD, TWO
SCREWS PER BOARD PER CROSSMEMBER;
THRESHOLD FLUSH TO REAR WITH DRAIN
HOLES

UNDERESTURCTURE

FOR SINGLE AXLE - 3" STEEL I-BEAMS ON
12" CENTERS WITH STEEL PAN OVER
TIRE AREA; 4" STEEL I-BEAM
LONGITUDINAL RAILS; MYLAR TAPE
BETWEEN CROSSMEMBER AND BOTTOM
RAIL

INTERIOR LINER

SIDES - 3/8" PLYWOOD, FULL HEIGHT

INTERIOR LINER

FRONT - 1/2" PLYWOOD, FULL HEIGHT

ROOF

ONE PIECE CROWNED ROOF - .032"

REAR FRAME

PAINTED GALVANNEALED STEEL WITH
BUILT-IN CLEARANCE LIGHT PROTECTING
HEADER; GRAB HANDLE ON CURBSIDE

REAR DOOR

TODCO PLASTIC COVERED OVERHEAD

EXTERIOR LIGHTS

GROTE TURTLEBACK - PER FMVSS-108
SPECIFICATIONS, INCLUDING
REFLECTORS

INTERIOR LIGHT

DOMELIGHT WITH SWITCH IN CAB

DOCK BUMPER

10" WOOD FILLED

D.O.T. UNDERRIDE

5" STRUCTURAL STEEL UNDERRIDE
PROTECTOR WITH POOCHED
HORIZONTAL SURFACE

MOUNTING

UNDERCOATED; MOUNTED WITH
TAPERED WOOD SLEEPER SLATS AND
5/8" DIAMETER STEEL U-BOLTS
PAINTED; BLACK; MORGAN ANTI-SAIL

703660 6220260

Truck Spec #1 - Body: Morgan

ALUMINUM SHEET; TENSION INSTALLED
OVER GALVANIZED STEEL ROOF BOWS
ON 24" CENTERS WITH ADHESIVE

MUD FLAPS INSTALLED

FOB POINT: FACTORY

Figure 6b

[Back To Top](#)

Select Van Body:

	MODEL					
	Interior Height/Rear Door Opening (In Inches)					
	GVSD79 79 ¹ / ₈ - 73 ¹ / ₄	GVSD85 85 ¹ / ₈ - 79 ¹ / ₄	GVSD91 91 ¹ / ₈ - 85 ¹ / ₄	GVSD97 97 ¹ / ₈ - 91 ¹ / ₄	GVSD103 103 ¹ / ₈ - 97 ¹ / ₄	GVSD109 109 ¹ / ₈ - 103 ¹ / ₄
18'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$4,495.00	\$4,544.00	\$4,595.00	\$4,665.00	\$4,823.00	\$4,865.00
20'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$4,751.00	\$4,800.00	\$4,852.00	\$4,927.00	\$5,104.00	\$5,145.00
22'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$5,129.00	\$5,184.00	\$5,239.00	\$5,318.00	\$5,500.00	\$5,546.00
24'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$5,398.00	\$5,547.00	\$5,526.00	\$5,592.00	\$5,780.00	\$5,825.00

[Back To Top](#)

Select Options:

	18' Body	20' Body	22' Body	24' Body
Translucent Roof:	<input type="checkbox"/> \$81.00	<input type="checkbox"/> \$90.00	<input type="checkbox"/> \$99.00	<input type="checkbox"/> \$108.00
"E" Track (recessed):	<input type="checkbox"/> \$148.00	<input type="checkbox"/> \$165.00	<input type="checkbox"/> \$181.00	<input type="checkbox"/> \$198.00
Scuff Liner (12ga x 16" steel):	<input type="checkbox"/> \$214.00	<input type="checkbox"/> \$218.00	<input type="checkbox"/> \$247.00	<input type="checkbox"/> \$253.00

☐ Tie Rings (@ \$7.00 each) QTY:

☐ Forklift Package \$256.00

NOTE: Must check interior body height and door opening.

1030220200

Truck Spec #1 - Body: Morgan

	10'	12'	14'
Walk Ramp:	└ \$392.00	└ \$418.00	└ \$466.00

Figure 6c

Lift Gates:	2000 LB	2500 LB	3000 LB
Waltco 72x32 W/4" RAMP	└ \$1390.00	N/A	N/A
Maxon 72x25LMR	N/A	└ \$1570.00	N/A
Maxon 40x72	N/A	N/A	└ \$2090.00
Waltco 72X38 W/4" RAMP	N/A	└ \$1579.00	└ \$1753.00

NOTE: ALL PRICING IS CURRENT AS OF THIS DATE AND CAN CHANGE WITHOUT NOTICE DUE TO MANUFACTURERS PRICE INCREASE

[Back To Top](#)

Calculate Subtotal (Body):

[Back To Top](#)


Calculate Total Price (Chassis + Body):

[Back To Top](#)

TO BE USED FOR RECORD

Truck Spec #2 - Chassis

Truck EZ Specs



Medium Duty Truck EZ Spec #2

Figure 79

GE Standard Chassis Spec | Go to GE Standard Body Spec

GENERAL MOTORS

FORD

FREIGHTLINER

INTERNATIONAL

STERLING

GE Capital Fleet Services

**STANDARD SPEC 2 - WB 206 - CA 138 - GVW 33,000 - APPROX. PAYLOAD
14,000 - 18,000 LB**

ENGINE:

250HP @2300 RPM 660 lb. torque

ENGINE EQUIPMENT:

Two Plate 14" clutch
Block Heater Phillips 120v, 1250
Watt
Exhaust single horizontal muffler
Fan drive viscous
100 Amp alternator
Two 12v 1300 cca batteries
Starter MT-37 type 350
Back up Alarm
Silicone Hoses (Radiator)

Transmission:

6 Speed Transmisson
Transmission EM GARD 50W)
Synthetic

FRONT AXLE:

12,000 Lb.
Front Shocks
12,000 Lb. Spring capacity

REAR AXLE:

21,000 Lb. Rear Axle
23,500 Lb. Capacity springs
Shock absorbers
Aux. Rear Springs 4.500 Lb.

BRAKES:

Air Brake system ABS
Air Dryer AD-9 Heated
Ft Brakes 15.00 x 4 "
RR Brakes 16.5 x 7.0"

FRAME:

Wheel Base 206 - CA 138
Rails 10.00 x 3.00 x .250 High strength
Alloy Stl
Reinforced Frame Partial Inverted L
50,000 PSI
Full Width Bumper Aerodynamic

FUEL TANKS:

Single 50 gallon fuel tank
Fuel water separator w/heat
Fuel tank top draw

TIRES AND WHEELS:

Frt. 11Rx 22.5 Goodyear G159
RR 11Rx 22.5 Goodyear G167
Frt. Wheels 22.5 Steel disc
RR Wheels 22.5 Steel disc

CAB EQUIPMENT:

Cab Conventional 100.8"
Glass Tinted
Color Interior Pearl Gray
Mirrors West Coast 16 x 7" Heated for
102" wide Convex mirrors 8"
Interior Trim Deluxe
Exterior Color White

FOCUS 2000


Truck Spec #2 - Chasis

Intermittent wipers
AM/FM Stereo
Halogen head lights
Day time running lights
Cigar lighter

Figure 7b

11/11/2011 10:11:11 AM

Truck EZ Specs



Medium Duty Truck EZ Spec #2

Figure 8a

View GE Standard Chassis Spec

GENERAL MOTORS

FORD

FREIGHTLINER

INTERNATIONAL

STERLING

GE Capital Fleet Services

Freightliner SPEC 2 -- WB 204 -- CA 138 -- GVW 33,000 -- Approx. Payload

14,000 to 18,000 Lb.

MODEL FL70 S/A Truck

\$37,800.00

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

CAT CFE 250 HP@ 2200RPM 660 lb.
Torque

ENGINE EQUIPMENT:

Clutch: Two plate 14" Ceramic
Block Heater: Phillips 1000 Watt/120V

Exhaust: Single Horizontal Muffler
Fan Drive: Viscous
Alternator: 100 Amp, Delco 22-SI
Batteries: Two 12V 1850 CCA
Starter: Delco 41 Type MT400
Compressor: Bendix 13.2 CFM
Coolant Hoses: Gates Blue Stripe

Transmission:

Fuller FS6406A 6 Speed
Lube: Mobil Synthetic 50 Wt.

FRONT AXLE:

Meritor FF-961 12,000 GVW
Front Shock Absorbers
12,000 lb. Capacity

REAR AXLE:

BRAKES:

Brake Package: Air - ABS
Front: Mertior Cam 15"x4" Q+
Rear: Meritor Cam 16.5x7 Q+
Air Dryer: Bendix AD-9 With Heater

FRAME:

Frame Rails: 5/16"x3"x10 1/8"
Reinforcement: Outer Frame 1/4"
Bumper: 12" Painted, Three Piece Steel
Hooks: Two Front Frame Mounted

FUEL TANKS:

RH: 45 Gallon Long
LH: Optional
Fuel/Water Separator: Racor #325R
Heated

TIRES AND WHEELS:

Frt: 11R22.5 Michelin XZA2
RR: 11R22.5 Michelin XM+S4
Frt. Wheels: 22.5 Steel Disc
RR: Wheels: 22.5 Steel Disc

CAB EQUIPMENT:

Cab Conventional 106"
Glass: Tinted

Freightliner

Truck Spec #2 - Freightliner

Meritor RS-21-145 21,500 lb. Capacity

Suspension: 23,000 lb capacity

Axle Ratio: 4.11

Lube: Mobil Synthetic 50 wt.

Interior color: Gray Vinyl

Mirrors: SS West Coast With Heat

Mirrors: LH,RH 8" Convex, Bright

Interior Trim: Custom

Exterior Color: White

Wipers: Intermittent

Radio: AM/FM STEREO w/Weatherband

Headlights: Single halogen w/day

running lamps

Lighter: Cigar

Alarm: Backup

[Back To Top](#)

Figure 8b

Select Options:

WHEEL BASE OPTIONS:

☐ APPROX 229 WITH 156 CA (20' BODY)

\$N/C

☐ APPROX 241 WITH 168 CA (22' BODY)

\$N/C

☐ APPROX 259 WITH 186 CA (24' BODY)

\$N/C

CAB OPTIONS:

☐ AIR CONDITIONING \$487.41

☐ AIR DRIVERS SEAT (SELF CONTAINED)

\$96.00

☐ PASSENGER SEAT (FIXED) \$ 321.00

☐ CLOTH SEATS \$ 321.00

ENGINES AND TRANSMISSEIONS:

☐ 230 HP ENGINE WITH 6 SPEED

TRANS. \$1,923.00 (FULLER 6 SPEED FS5306)

☐ 250 HP ENGINE WITH 6 SPEED

TRANS. Standard (FULLER FS6306)

FUEL TANKS:

☐ DUAL 50 GALLON \$1,030.00

[Back To Top](#)

Calculate Subtotal (Chassis):

37800.00

[Back To Top](#)

Figure 9a



PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

STANDARD SPEC 3 -- WB 169 -- CA 103 -- GVW 65,000 -- Approximate Payload 28,000 Lb.

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated
Hand Control & Tractor Protection
Valves

FRAME:

10.125" x 3.580" x .312"
Deck Plate 15"
Frt. Tow Hooks
Frt. Bumper Full Width Light Weight
5th Wheel Stationary
12' Elec. And Air Hoses

FUEL TANKS:

100 Gal. Tank
Fuel Water Separator Con Met CMI
680w/ Heat

TIRES AND WHEELS:

11R22.5 Frt. Goodyear G159
11R22.5 RR Goodyear G167A
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Conventional Cab
Air Conditioning
Dual Rect. 16 x 7" Heated
Dual Convex Mirrors
One Convex Mirror Hood Mounted RH
Driver Seat High Back Air

Truck Spec #3 - Chasis

Meritor RS-23-160 23,000 Lb. Capacity
Rear Suspension 23,000 Lb. Capacity
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic

Pass Seat Non-Suspension Intermediate
Back
AM/FM Stereo
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict. Access Frame Non Bright
Steering Wheel Non Telescoping
Intermittant Wipers
Color White

Figure 9b

FOR OFFICIAL USE ONLY

Figure 10a



PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

\$70,390.00

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

Cab: Conventional Curved Glass

Truck Spec #3 - Kenworth

23K Eaton 23105S (Single)
Suspension: 23K 79KB Taperleaf
Axle Ratio: 3.90
Lube: Synthetic

TRAILER EQUIPMENT

Floodlight: Single Pedestal -Primary
Air Lines: 12' Straight
Electric Lines: 12' Straight
Tractor Kit: BOC Mtd, Bar/Sprg Hanger
Gladhand

[Back To Top](#)

Alum/Fiberglass
Glass: Tinted
Interior Color: Graystone
Mirrors: Dual KW Aero Motor/HTD
Mirrors: Dual Htd 8.5" Convex-Integral
Interior Trim: "New Style" Splendor
Driver Seat: KW Air Cushion Plus HB Vinyl
Pass Seat: KW Air Cushion Plus HB Vinyl
Exterior Color: White
Wipers: Electric 2 Speed w/Intermittent
Radio: Panasonic AM/FM
w/Cassette/Weatherband
Headlights: Dual Rectangular-Halogen
Ashtray: Two w/lighter (2)
Horn: Dual Round Painted Under Cab
Fairing: Roof Airshield/Undercab/Side
Extenders

Select Options:

Figure 10b

BATTERY OPTIONS:

☐ 4 MAINTENANCE FREE BATTERIES
\$138.00

[Back To Top](#)

Calculate Subtotal (Chassis):

70390.00

(reset)

[Back To Top](#)

70390.00

[illegible]

Figure 11a



PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

STANDARD SPEC 4 -- WB 169 -- CA 103 -- GVW 80,000 -- Approximate Payload 46,000 Lb.

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated All Tanks
Hand Control & Tractor Protection
Valves

FRAME:

11/32" x 3 1/2" x 10 3/16"
Deck Plate 20"
Frt. Tow Hooks
Huck-Spin Round Except 5th Wheel
5th Wheel Air Slide Fontaine 6AWB No
Slack 24"
12' Elec. And Air Hoses

FUEL TANKS:

Dual 100 Gal. Tanks
Fuel Water Separator Webb Warm N Dry
w/Heat
23" Diameter Tanks

TIRES AND WHEELS:

11R22.5 Frt Mich. XZA2
11R22.5 RR Mich. XDHT
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Conventional Cab
Air Conditioning
Dual Rect. 16 x 7" SS Heated W/Moto

Truck Spec #4 - Chasis

40,000 Lb. Capacity
Rear Suspension Air – 40,000 Lb.
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic
Air Dump Valve

RH Side
Dual Convex Mirrors
One Convex Mirror Hood Mounted RH
Driver Seat High Back Air
Pass Seat Non-Suspension Intermediate
Back V
AM/FM Stereo
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict.
Access Frame Non Bright
Steering Wheel Non Telescoping
Intermittant Wipers
Color White

Figure 11b

11b

Figure 12a



PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

**PETERBILT SPEC 4 -- WB 193 -- CA 100 - GCW 80,000 lb - Approx. Payload
42,000 - 46,000 lb
MODEL 379 6X4 REGIONAL TRACTOR
\$76,693.00**

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

Cat C15 375 - 435 HP @ 1800 RPM 1450
- 1550torque

Horton Fan Clutch
Silicone Radiator Hoses
Block Heater 110Volt
Alt. 130 Amp
Batteries (4) Delco 1150 CCA
42MT Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix

Fuller FRO16210C
Oil Cooler
Clutch Fuller 15.5 Ceramic

ABS Air Brakes
15.0 x 4.0 Frt. Air Brakes
16.5 x 7.0 Rear Air Brakes
Hand Control & Tractor Protection Valves
Rear magnetic Drain Valve

10 5/8" – 5/16" Rail Thickness
Deck Plate Package
Huck Bolt All Accessible Frm Components
Fontaine Air Slide 5th Wheel
12' Elec. and Air Hoses

Dual 100 Gallon Fuel Tanks
Webb Fuel Water Separator
26" Alum Fuel Tank

Truck Spec #4 - Peterbilt

Synthetic Oil
1810 Driveline Half Yoke

FRONT AXLE:

Eaton E12001 12,000 Lbs.
12,000 Lbs. Frt. Suspension
Frt. Shock Absorbers
Slack Adjusters Eaton

REAR AXLE:

Meritor RT40145 40,000 Lbs.
40,000 Lbs. Air Suspension
Auto Slack Adjusters
Synthetic Lube
Ratio 3.90

[Back To Top](#)

TIRES AND WHEELS

11R22.5 Frt. Mich. Tires
11R22.5 Rear Tires Mich.
Frt. Wheels 22.5 x 8.25
Rear Wheels 22.5 x 8.25

CAB EQUIPMENT

Aluminum Cab 119 BBC
Unibilt Day Cab
Air Conditioning
Thermal Insulation
SS Dual heated Mirrors
Dual Convex Mirrors
Driver Seat Hi Back Bucket
Passenger Seat Lo Back Fixed
AM/FM Stereo
Adjustable Steering Column
¼ Fenders Poly
Outside Sunvisor SS
Intermittent Wipers
Color White

Figure 12b

Select Options:

Brake Options:

☐ JAKE BREAK \$1,819.00

CAB OPTIONS:

☐ Telescoping/Tilt Wheel \$271.00

[Back To Top](#)

Calculate Subtotal (Chassis):

76693.00

 reset

[Back To Top](#)

76693.00

Truck Spec #5 - Chassis

Truck EZ Specs




Figure 13a

Over the Road Sleeper Tractor Truck EZ Spec #5

GE Standard Chassis Spec



GE Capital Fleet Services

STANDARD SPEC 5 - WB 248 - CA 130 - GVW 80,000 - Approx. Payload 42,000-44,000 Lb.

ENGINE:

475 HP @ 2100 RPM 1650 Lb. Torque

ENGINE EQUIPMENT:

Fan Drive on/off Kysor
Silicone Radiator Hoses
Block Heater 120v 1500 watt Jeb
Alt. 135 Amp
Batteries (4) Maintenance Free 2600 CCA
Radiator Anti Freeze -30 degrees
42MT with Over Crank Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix AD-IP

Transmission:

10 Speed Transmission
Oil Cooler
Clutch Eaton Fuller 15.5 Two Plate Easy Pedal
Synthetic Oil
Drive Line Meritor 18T ½ Round Yoke

FRONT AXLE:

12,000 Lb. Capacity Meritor FF-961
12,000 Lb. Frt. Suspension
Shock Absorbers
Spring Pins Rubber Bushing
Slack Adjusters Automatic

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated All Tanks
Hand Control & Tractor Protection Valves

FRAME:

11/32" x 3 ½ x 10 3/16"
Deck Plate 20" & ¼ Fenders
Frt. Tow Hooks
Huck-Spin Round Except 5th Wheel
5th Wheel Air Slide 24"
12' Elec. And Air Hoses Straight

FUEL TANKS:

Dual 120 Gal. Tanks
Fuel Water Separator /Heated
23" Diameter Tanks

TIRES AND WHEELS:

11R22.5 Frt Mich. XZA2
11R22.5 RR Mich. XDHT
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Sleeper Cab 48" Hi Rise
Air Conditioning
Dual Rect. 16 x 7" SS Heated W/Moto
RH Side
Dual Convex Mirrors

Truck Spec #5 - Chassis

Truck Spec #5 - Chasis

REAR AXLE:


40,000 Lb. Capacity
Rear Suspension 40,000 Lb. Air
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic
Air Dump Valve
3.90 Ratio

One Convex Mirror Hood Mounted RH
Driver Seat High Back Air
Pass Seat Non-Suspension Intermediate
Back
AM/FM Stereo w/ Cassette
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict. Access Frame Non Bright
Steering Wheel Telescoping and Tilting
Intermittant Wipers
Color White

Figure 13b

FOR RELEASE

Truck EZ Specs



Over the Road Sleeper Tractor Truck EZ Spec #5

Figure 14a

View GE Standard Chassis Spec



GE Capital Fleet Services

**PETERBILT SPEC 5 - WB 250 - CA 160 - GCW 80,000 - Approximate Payload
42,000 - 44,000 Lb.**

MODEL

\$86,648.53

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

Cat C15 475HP @ 1800 RPM 1650 torque

ENGINE EQUIPMENT:

Horton Fan Clutch

Silicone Radiator Hoses

Block Heater 110Volt

Alt. 130 Amp

Batteries (4) Delco 1150 CCA

42MT Starter

Circuit Breakers

Electronic Governor

Vertical Exhaust RH Bright Muffler Shield

Air Dryer Bendix

Transmission:

Fuller FRO16210C

Oil Cooler

Clutch Fuller 15.5 Ceramic

Synthetic Oil

BRAKES:

ABS Air Brakes

15.0 x 4.0 Frt. Air Brakes

16.5 x 7.0 Rear Air Brakes

Hand Control & Tractor Protection Valves

Rear magnetic Drain Valve

FRAME:

10 5/8" - 5/16" Rail Thickness

Deck Plate Package

Huck Bolt All Accessible Frm Components

Fontaine Air Slide 5th Wheel

12' Elec. and Air Hoses

FUEL TANKS

Dual 120 Gallon Fuel Tanks

Webb Fuel Water Separator

26" Alum Fuel Tank

FOR FIGURE 14a

FIGURE 15

